


Client: SINOPEC Qilu Petrochemical Co., Ltd.

Regression analysis according to ISO 9080 of the PE pipe grade DGDB2480H Natural

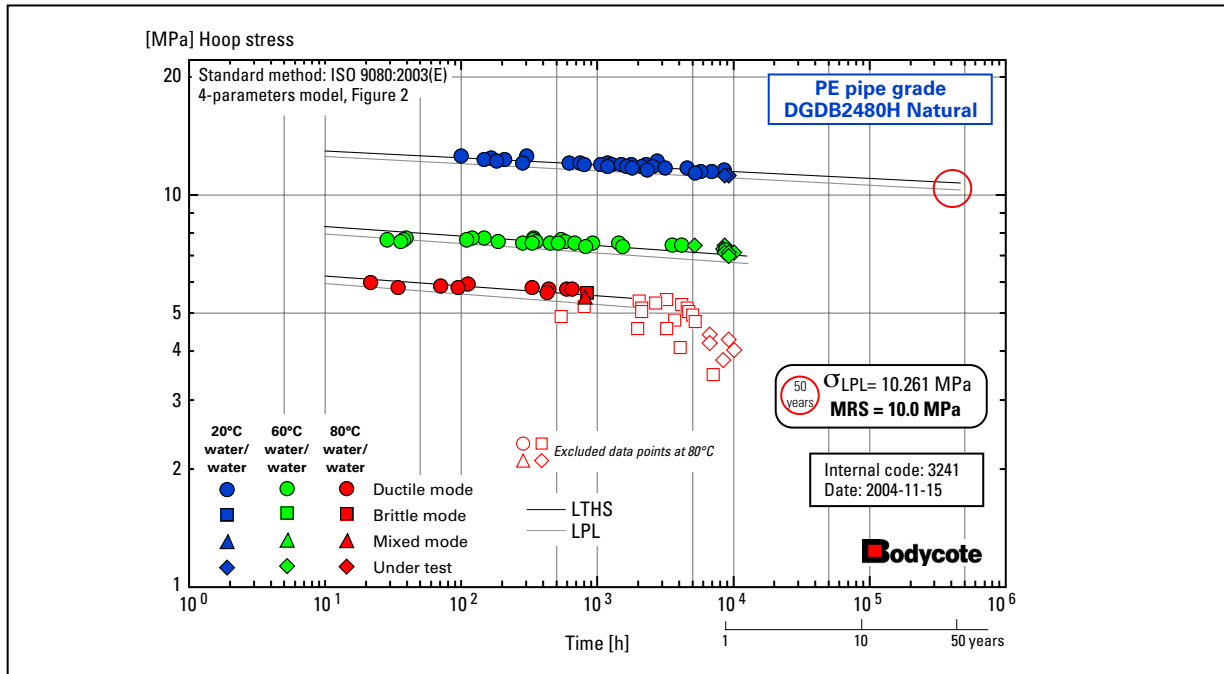

Introduction

Bodycote Polymer offers accredited testing and evaluation according to ISO 9080, i.e. hydrostatic pressure testing followed by evaluation of the long-term hydrostatic strength and MRS-classification according to ISO 12162.

Task

The aim was to use the Standard Extrapolation Method (SEM) according to ISO 9080:2003 in order to obtain a classification of the PE pipe grade DGDB2480H Natural from SINOPEC Qilu Petrochemical Co., Ltd.

The work covers hydrostatic pressure testing at 20, 60 and 80°C and a SEM-evaluation according to ISO 9080:2003.

Results obtained

The evaluation was performed in accordance with ISO 9080:2003. The 4-parameter model, Figure 2 gave the best fit.

Number of observations

20°C	60°C	80°C
31	33	34

Extrapolated strength values

Temp °C	Time yrs	σ_{LPL} MPa	σ_{LTHS} MPa
20	50.0	10.261	10.664
20	52.9	10.249	10.654
60	1.47	6.667	6.976
80	0.24	5.116	5.400

Classification: MRS = 10 MPa

Please contact us for further information!